Oki Data CONFIDENTIAL

C7550/C7350, C7500V2/C7300V2, C7500/C7300
Color LED Page Printer
For the General Public
RSPL

Bom | Use for | Certification Body

Rev	Date	DCO No.	Contents	Design	Approval
4	2004-09-22	SE2-0252	Change of Parts No. of Board-TNY-39	Hisashi Ishizuka	Hiroshi Ueno
5	2004-11-22	SE2-0275	Add C7350 for China/Taiwan/Korea	Hisashi Ishizuka	Hiroshi Ueno
6	2007-02-02	SB4-0043	Del Print Engine Controller PWB (K7N-600dp	Toyokazu Shiraishi	Koichi Negishi
7	2008-02-12	SAM-0015	DEL:Main-No.43 Oki LAN 6200e+	Yasuyo chigira	Koichi Negishi
8	2008-07-16	SP9-0127	Change Format(Epsilon)	Yumiko Tutumi	Yasuhiro Kaede

Approval	Design	Name
Keiichiro Yamazaki	Naomi Eguchi	Manual-Maintenance-3E-PX711 Recom.spare part.lst
Check: Osamu Watanabe		
Date: 2004-07-28	Oki Data Corporation	Drawing No. 42805201TR

Notes (80 Byte X 48 Line)

CU Assy confirmation subject.

[CU main board]
There are two kinds of CU main boards of C7550/C7350,C7500V2/C7300V2,C7500/C7300.
 OLD Version : TIG-3
 NEW Version : HME
ROM DIMM and EEPROM of each board cannot be used with the board of another side.

Combination	OK/NG	Main Board	Program DIMM	EEPROM
OLD Version	OK	TIG-3	Ver.x1.xx or x2.xx	93C86
NEW Version	OK	HME	Ver.x3.xx or x4.xx	24C32
NG	NG	TIG-3	Ver.x1.xx or x2.xx	24C32(NG)
Combination	Blank	TIG-3	Ver.x3.xx or x4.xx(NG)	93C86
	LCD	HME	Ver.x1.xx or x2.xx(NG)	24C32
		HME	Ver.x3.xx or x4.xx	93C86(NG)

[How to recognize]
 1:Serial No.

OLD Version xxxA xxxxxxx
NEW Version xxxB xxxxxxx or SAP system serial No. =>

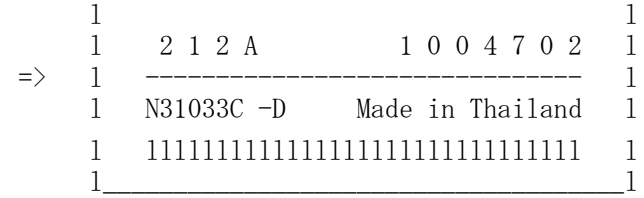

 2:Menu Map printting(CU F/W Ver.)
OLD Version:x1.xx or x2.xx / NEW Version:x3.xx or x4.xx
 3:Board appearance
OLD Version:
NEW Version:There is printting of "NBC-2" on the board.
The position of HDD and Centoro.(See page 130)
[Program ROM DIMM]
There are two kinds of program ROM DIMM.
 CRF : Flash ROM DIMM / TNY : P2ROM DIMM
Flash ROM is rewritable. P2ROM is not rewritable.
(Parts number are also changed whenever the versions change.)
[NIC Card]
There are three kinds of NIC Cards.
(Oki LAN 6200e+):ODA,(Oki LAN 7300e):ODA/OEL/APS,(Oki LAN 8100e):ODA/OEL/APS

Note: To use Oki LAN 8100e, software for the NIC must be downloaded to a CU main board.Software for the NIC is downloaded to a CU main board (HME) before shipment of a printer or a service board. As software is deleted when forced initialization is performed to a Flash ROM,redownloading of the software is required. Software is not downloaded to a TIG-3 also a program ROM DIMM doesn't support the software. Accordingly, the Soft NIC (Oki LAN 8100e) isnot usable even if software for the NIC is downloaded to a TIG-3 board.

Applicable

Part No.	Printer Series	Destination	Voltage	Model No.	Note
41955701					
41955703					
41955707					
41955711					
41955713					
41955714					
41955715					
41955717					
41955737					
41955743					
41955744					
41955745					
41955747					
41955755					
41955756					
41955757					
41955758					
41955759					
41955760					
41955761					
41955762					
41955763					
41955801					
41955803					
41955807					
41955811					
41955813					
41955814					
41955815					
41955837					
41955843					
41955844					
41955845					
41955854					
41955855					
41955856					
41955859					
41955860					

Rev	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Special	Del/ Add	ks for environment
						per 500	per 1000	per 2000				
	Main Assembly	1	40864601	Cover Assy.-Front	1	3	6	12				
	Main Assembly	2	41042501	Guide-Sheet(Bottom)	1	3	6	12				
	Main Assembly	3	40866701	Cassette Assy	1	3	6	12				
	Main Assembly	4	41438401	Frame Assy.-Separation	1	3	6	12				
	Main Assembly	6	40864301	Cover-Rear	1	3	6	12				
	Main Assembly	7	41374902	Stacker Assy.-F UP	1	3	6	12				
	Main Assembly	8	40864411	Cover-Side(L)	1	3	6	12				
	Main Assembly	9	40864503	Cover-Side(R)	1	3	6	12				
	Main Assembly	10	40862006	Feeder Assy.-Front-PX711	1	3	6	12				
	Main Assembly	11	40866301	Cover-Assy FF	1	3	6	12				
	Main Assembly	12	41045801	Stay-Links	2	6	12	24				
	Main Assembly	13	40325101	Gear-z68	1	3	6	12				
	Main Assembly	14	40952701	Frame-Top	1	3	6	12				
	Main Assembly	18	41960404	Board-K7N	1	3	6	12	1200dpi			
	~~Main Assembly~~	~~18~~	~~41960402~~	~~Board-K7N~~	~~1~~	~~3~~	~~6~~	~~12~~	~~600dpi 指定禁止~~		D	
	Main Assembly	18	42433201	Board-K7V	1	3	6	12	600dpi(VE)			
	Main Assembly	18	41960406	Board-K7N maintenance	1	3	6	12	1200dpi(C7550)			
	Main Assembly	18	42433206	Board-K7V	1	3	6	12	600dpi(C7350)			
	Main Assembly	19	40197102	Motor-Fan(CU)	1	3	6	12				
	Main Assembly	20	40864901	Frame Assy.-Release	1	3	6	12				
	Main Assembly	21	41275701	Microswitch-Assy	1	3	6	12				
	Main Assembly	22	41439401	Spring-Separation	2	6	12	24				
	Main Assembly	23	PB4083-2500P008	TAPPING SCREW B2	14	-	-	-				
	Main Assembly	24	PB4013-3100P008	Cup Screw B	2	-	-	-				
	Main Assembly	25	PSW2-8C	Screw	1	-	-	-				
	Main Assembly	26	8162303M0001	93C66	1	3	6	12				
	Main Assembly	28	PB4083-2500P010	TAPPING SCREW B1	13	-	-	-				
	Main Assembly	29	PB4013-3100P006	Cup Screw A	42	-	-	-				
	Main Assembly	30	41945601	Fuser-Unit-PX711-120V(ODA)	1	-	-	-	ODA(120V)			
	Main Assembly	30	41945603	Fuser-Unit-PX711-230V(OEL)	1	-	-	-	OEL/APS			
	Main Assembly	30	41945607	Fuser-Unit-PX711-230V(ODA)	1	-	-	-	ODA(230V)			
	Main Assembly	30	41945614	Fuser-Unit-PX711-230V(CHN)	1	-	-	-	CHINA			
	Main Assembly	30	41945621	Fuser-Unit-PX711-TWN	1	-	-	-	TAIWAN			
	Main Assembly	31	41945501	Transfer-Belt-Unit-PX711	1	-	-	-	ODA			
	Main Assembly	31	41945503	Transfer-Belt-Unit-PX711(OEL)	1	-	-	-	OEL			
	Main Assembly	31	41945509	Transfer-Belt-Unit-PX711(AOS)	1	-	-	-	APS			
	Main Assembly	32	41962801	ID unit-Type C4 Y	1	-	-	-	ODA			
	Main Assembly	32	41962802	ID unit-Type C4 M	1	-	-	-	ODA			
	Main Assembly	32	41962803	ID unit-Type C4 C	1	-	-	-	ODA			
	Main Assembly	32	41962804	ID unit-Type C4 K	1	-	-	-	ODA			
	Main Assembly	32	41962805	ID unit-Type C4 Y	1	-	-	-	OEL			
	Main Assembly	32	41962806	ID unit-Type C4 M	1	-	-	-	OEL			

Rev	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Special	Del/ Add	ks for environment
						per 500	per 1000	per 2000				
	Main Assembly	32	41962807	ID unit-Type C4 C	1	-	-	-	OEL			
	Main Assembly	32	41962808	ID unit-Type C4 K	1	-	-	-	OEL			
	Main Assembly	32	41962809	ID unit-Type C4 Y	1	-	-	-	APS			
	Main Assembly	32	41962810	ID unit-Type C4 M	1	-	-	-	APS			
	Main Assembly	32	41962811	ID unit-Type C4 C	1	-	-	-	APS			
	Main Assembly	32	41962812	ID unit-Type C4 K	1	-	-	-	APS			
	Main Assembly	32	41962853	ID unit-Type C4 Y	1	-	-	-	KOREA			
	Main Assembly	32	41962854	ID unit-Type C4 M	1	-	-	-	KOREA			
	Main Assembly	32	41962855	ID unit-Type C4 C	1	-	-	-	KOREA			
	Main Assembly	32	41962856	ID unit-Type C4 K	1	-	-	-	KOREA			
	Main Assembly	33	41963001	Toner-Cartridge Type C4 Y	1	-	-	-	ODA			
	Main Assembly	33	41963002	Toner-Cartridge Type C4 M	1	-	-	-	ODA			
	Main Assembly	33	41963003	Toner-Cartridge Type C4 C	1	-	-	-	ODA			
	Main Assembly	33	41963004	Toner-Cartridge Type C4 K	1	-	-	-	ODA			
	Main Assembly	33	41963005	Toner-Cartridge Type C4	1	-	-	-	OEL			
	Main Assembly	33	41963006	Toner-Cartridge Type C4	1	-	-	-	OEL			
	Main Assembly	33	41963007	Toner-Cartridge Type C4	1	-	-	-	OEL			
	Main Assembly	33	41963008	Toner-Cartridge Type C4	1	-	-	-	OEL			
	Main Assembly	33	41963009	Toner-Cartridge Type C4 Y	1	-	-	-	APS			
	Main Assembly	33	41963010	Toner-Cartridge Type C4 M	1	-	-	-	APS			
	Main Assembly	33	41963011	Toner-Cartridge Type C4 C	1	-	-	-	APS			
	Main Assembly	33	41963012	Toner-Cartridge Type C4 K	1	-	-	-	APS			
	Main Assembly	33	41963065	Toner-Cartridge Type C4 Y	1	-	-	-	KOREA			
	Main Assembly	33	41963066	Toner-Cartridge Type C4 M	1	-	-	-	KOREA			
	Main Assembly	33	41963067	Toner-Cartridge Type C4 C	1	-	-	-	KOREA			
	Main Assembly	33	41963068	Toner-Cartridge Type C4 K	1	-	-	-	KOREA			
	Main Assembly	33	41963201	Toner-Cartridge Type C4 S	1	-	-	-	ODA			
	Main Assembly	33	41963202	Toner-Cartridge Type C4 S	1	-	-	-	ODA			
	Main Assembly	33	41963203	Toner-Cartridge Type C4 S	1	-	-	-	ODA			
	Main Assembly	33	41963204	Toner-Cartridge Type C4 S	1	-	-	-	ODA			
	Main Assembly	33	41963205	Toner-Cartridge Type C4 S	1	-	-	-	OEL			
	Main Assembly	33	41963206	Toner-Cartridge Type C4 S	1	-	-	-	OEL			
	Main Assembly	33	41963207	Toner-Cartridge Type C4 S	1	-	-	-	OEL			
	Main Assembly	33	41963208	Toner-Cartridge Type C4 S	1	-	-	-	OEL			
	Main Assembly	33	41963209	Toner-Cartridge Type C4 S	1	-	-	-	APS			
	Main Assembly	33	41963210	Toner-Cartridge Type C4 S	1	-	-	-	APS			
	Main Assembly	33	41963211	Toner-Cartridge Type C4 S	1	-	-	-	APS			
	Main Assembly	33	41963212	Toner-Cartridge Type C4 S	1	-	-	-	APS			
	Main Assembly	34	41377401	Plate-Indicator	1	3	6	12				
	Main Assembly	35	41884009	Board CU-TIG Spec.	1	3	6	12	600dpi/1200dpi (OLD Version)			
	Main Assembly	35	42503109	Board-HME Spec.	1	3	6	12	600dpi/1200dpi (NEW Version)			
	Main Assembly	36	8164323M0000	M93C86-WBN6P	1	3	6	12	93C86(for TIG)			

Rev	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year per 500	per 1000	per 2000	Remarks	Special	Del/ Add	ks for environment
	Main Assembly	36	8165323M0000	M24C32-WBN6P	1	3	6	12	24C32(for HME)			
	Main Assembly	37	42277502	Board-CRF Spec PX711(1200dpi)	1	3	6	12	C7500(for TIG) FlashROM			
	Main Assembly	37	42277506	Board-CRF Spec PX711(600dpi)	1	3	6	12	C7300(for TIG) FlashROM			
	Main Assembly	37	42567301	PX711 Maintenance P2-ROM DIMM Spec.	1	3	6	12	C7300 Ver.A2.05 (for TIG)P2ROM			
	Main Assembly	37	42277509	Board-CRF Spec	1	3	6	12	Flash ROM DIMM which is not written in			
	Main Assembly	37	42277521	Board-CRF Spec PX711-VE(PS/PCL)	1	3	6	12	C7500V2/C7300V2,C7500 /C7300 (for HME)FlashROM			
	Main Assembly	37	42567302	PX711-VE Maintenance P2-ROM DIMM Spec.	1	3	6	12	C7500V2/C7300V2,C7500 /C7300 Ver.A3.14 (for HME)P2ROM			
	Main Assembly	37	42277533	Board-CRF Spec C7350/C7550	1	3	6	12	C7550/C7350 (for HME)FlashROM			
	Main Assembly	37	42567303	C7350/7550 Maintenance P2-ROM DIMM Spec.	1	3	6	12	C7550/C7350 Ver.A4.07(for HME) P2ROM			
	Main Assembly	39	41437446	Board-Memory 64MB	1	3	6	12	ODA			
	Main Assembly	39	41437447	Board-Memory 128MB	1	3	6	12	ODA			
	Main Assembly	39	41437448	Board-Memory 256MB	1	3	6	12	ODA			
	Main Assembly	39	41437449	Board-Memory 512MB	1	3	6	12	ODA			
	Main Assembly	39	41437441	Board-Memory 64MB	1	3	6	12	OEL			
	Main Assembly	39	41437442	Board-Memory 128MB	1	3	6	12	OEL			
	Main Assembly	39	41437443	Board-Memory 256MB	1	3	6	12	OEL			
	Main Assembly	39	41437444	Board-Memory 512MB	1	3	6	12	OEL			
	Main Assembly	39	41437436	Board-Memory 64MB	1	3	6	12	APS			
	Main Assembly	39	41437437	Board-Memory 128MB	1	3	6	12	APS			
	Main Assembly	39	41437438	Board-Memory 256MB	1	3	6	12	APS			
	Main Assembly	39	41437439	Board-Memory 512MB	1	3	6	12	APS			
	Main Assembly	43	41997101	Board-MLETB11	1	3	6	12	ODA/OEL/APS			
	Main Assembly	43	42507701	Board-HMN	1	3	6	12	ODA			
	Main Assembly	43	42507702	Board-HMN	1	3	6	12	OEL/APS			
	Main Assembly	44	41376019	HDD Assy 10GB for Maintenance	1	3	6	12	10GB or more			
	Main Assembly	46	41278601	Guide-Rail(A)	2	6	12	28				
	Main Assembly	47	41278701	Guide-Rail(B)	1	3	6	12				
	Main Assembly	48	41410201	Motor-Fan	1	3	6	12				
	Main Assembly	49	41467401	Plate-FG(Centoro)	1	3	6	12				
	Main Assembly	50	41254601	Plate-Blank	2	6	12	28				
	Main Assembly	51	41723901	Screw-Knob	4	-	-	-				
	Main Assembly	52	1050003C0006	TFC-20-/TFT-102010N	1	3	6	12				
	Top Cover Assembly	1	40859702	Cover-Stacker	1	3	6	12				
	Top Cover Assembly	2	42461001	LED Head-711-1200dpi-Kit	4	12	24	48				
	Top Cover Assembly	2	42460901	LED Head-711-600dpi-Kit	4	12	24	48				
	Top Cover Assembly	3	42459501	Spring-Head	8	24	48	96				
	Top Cover Assembly	4	41960901	Board-Y73	1	3	6	12	600dpi			
	Top Cover Assembly	4	42124801	Board- Y7X	1	3	6	12	1200dpi			
	Top Cover Assembly	5	40365404	SENSOR-Stack Full	1	3	6	12	600dpi			
	Top Cover Assembly	5	40365405	SENSOR-Stack Full	1	3	6	12	1200dpi			

Rev	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Special	Del/ Add	ks for environment
						per 500	per 1000	per 2000				
	Top Cover Assembly	6	41316503	Cover Assy.-Inner(Sub)	1	3	6	12				
	Top Cover Assembly	7	42406404	Cord Assy Head(C)	1	3	6	12	600dpi			
	Top Cover Assembly	8	42406403	Cord Assy Head(M)	1	3	6	12	600dpi			
	Top Cover Assembly	9	42406402	Cord Assy Head(Y)	1	3	6	12	600dpi			
	Top Cover Assembly	10	42406401	Cord Assy Head(K)	1	3	6	12	600dpi			
	Top Cover Assembly	11	41593101	Cable Assy.-POW	1	3	6	12	600dpi			
	Top Cover Assembly	12	2381021P0021	TW-VFM-14-0.1X-130	4	12	24	48	1200dpi			
	Top Cover Assembly	13	2381021P0020	TW-VFM-12-0.1X-130	4	12	24	48	1200dpi			
	Top Cover Assembly	14	41765601	Roller-Idle(FD)	8	24	48	96				
	Top Cover Assembly	15	40860602	Sensor Assy.-Toner	4	12	24	48				
	Top Cover Assembly	16	40866102	Frame Assy.-OP Panel	1	3	6	12				
	Top Cover Assembly	17	42542702	OP panel-Welding	1	3	6	12	600dpi(OEL/APS)			
	Top Cover Assembly	17	42542703	OP panel-Welding	1	3	6	12	1200dpi(OEL/APS)			
	Top Cover Assembly	17	42542707	OP panel-Welding	1	3	6	12	600dpi(ODA)			
	Top Cover Assembly	17	42542708	OP panel-Welding	1	3	6	12	1200dpi(ODA)			
	Top Cover Assembly	17	42542730	OP panel-Welding	1	3	6	12	600dpi(ODA)			
	Top Cover Assembly	17	42542731	OP panel-Welding	1	3	6	12	1200dpi(ODA)			
	Top Cover Assembly	17	42542732	OP panel-Welding	1	3	6	12	600dpi(OEL)			
	Top Cover Assembly	17	42542733	OP panel-Welding	1	3	6	12	1200dpi(OEL)			
	Top Cover Assembly	17	42542734	OP panel-Welding	1	3	6	12	600dpi(CHINA)			
	Top Cover Assembly	17	42542735	OP panel-Welding	1	3	6	12	600dpi(KOREA)			
	Top Cover Assembly	17	42542736	OP panel-Welding	1	3	6	12	600dpi(TAIWAN)			
	Top Cover Assembly	18	2381003P0014	HCUJ/TW-VFM/6F-150	1	3	6	12				
	Top Cover Assembly	19	40861501	Guide Assy.-Eject	1	3	6	12				
	Top Cover Assembly	20	42167601	Cord Assy Head 711	1	3	6	12	1200dpi			
	Top Cover Assembly	21	PB4083-2500P008	TAPPING SCREW B2	19	-	-	-				
	Top Cover Assembly	22	40197106	Motor-Fan(CU)	1	3	6	12				
	Top Cover Assembly	23	41469007	Motor-Fan	1	3	6	12				
	Top Cover Assembly	24	42447501	Post-Guide	8	24	48	96				
	Prunter Unit Chassis	1	41189701	Drum contact assembly	4	12	24	48				
	Prunter Unit Chassis	2	40844306	Roller-Assy Regist A-PX711	1	3	6	12				
	Prunter Unit Chassis	3	40844303	Roller-Assy Regist B	1	3	6	12				
	Prunter Unit Chassis	4	40845401	Gear-RE3	1	3	6	12				
	Prunter Unit Chassis	5	41187102	Gear-Assy Clutch-PX711	1	3	6	12				
	Prunter Unit Chassis	6	40845801	Motor-Assy Regist	1	3	6	12				
	Prunter Unit Chassis	7	42153101	Fan Motor Assy	1	3	6	12				
	Prunter Unit Chassis	8	41944001	Sensor-Assy.-Regist-PX711	1	3	6	12				
	Prunter Unit Chassis	9	41968701	Magnet Assy.-	1	3	6	12				
	Prunter Unit Chassis	10	41944201	Plate-Shutter(Adhesive)-PX711	1	3	6	12				
	Prunter Unit Chassis	11	41968501	Spring-Compression	1	3	6	12				
	Prunter Unit Chassis	12	40859201	Guide Assy.-Dup	1	3	6	12				
	Prunter Unit Chassis	13	41940301	Printer-Chassis-PX711	1	3	6	12				

Rev	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Special	Del/ Add	ks for environment
						per 500	per 1000	per 2000				
	Prunter Unit Chassis	14	41312801	Plate Assy Damper(L)	1	3	6	12				
	Prunter Unit Chassis	15	41312901	Plate Assy Damper(R)	1	3	6	12				
	Prunter Unit Chassis	16	40841601	Sensor-Ent1	1	3	6	12				
	Prunter Unit Chassis	17	40841701	Sensor-Ent2	1	3	6	12				
	Prunter Unit Chassis	18	40841801	Sensor-Write	1	3	6	12				
	Prunter Unit Chassis	19	41258301	Board-R71	1	3	6	12				
	Prunter Unit Chassis	21	41253602	Magnet Assy Duplex-PX711	1	3	6	12				
	Prunter Unit Chassis	22	40842401	Gear-EXB	2	6	12	24				
	Prunter Unit Chassis	23	40316301	GEAR-Roller(C)	1	3	6	12				
	Prunter Unit Chassis	24	42170801	Gear-Oneway EXA(711)	1	3	6	12				
	Prunter Unit Chassis	25	40323902	ROLLER-Feed(C)	1	3	6	12				
	Prunter Unit Chassis	26	PP4076-3949P001	Bush	1	3	6	12				
	Prunter Unit Chassis	27	PP4043-4489P001	Bearing-Feed	1	3	6	12				
	Prunter Unit Chassis	28	40842501	Plate-FG EX	1	3	6	12				
	Prunter Unit Chassis	29	41073601	Sensor Assy.-Exit	1	3	6	12				
	Prunter Unit Chassis	30	40841301	Lever-Lock-Heat L	1	3	6	12				
	Prunter Unit Chassis	31	40841501	Spring-Lock Lever	2	6	12	24				
	Prunter Unit Chassis	32	40848801	Motor-Assy Belt	1	3	6	12				
	Prunter Unit Chassis	33	40841401	Lever-Lock-Heat R	1	3	6	12				
	Prunter Unit Chassis	34	41469004	Motor-Fan	1	3	6	12				
	Prunter Unit Chassis	35	40847306	Motor Assy Main-PX711	1	3	6	12				
	Prunter Unit Chassis	36	40846001	Motor-Pulse Feed(42)	1	3	6	12				
	Prunter Unit Chassis	37	40848501	Gear-H1	1	3	6	12				
	Prunter Unit Chassis	38	40848601	Gear-H2	1	3	6	12				
	Prunter Unit Chassis	39	41303606	Plate-Assy L-PX711	1	3	6	12				
	Prunter Unit Chassis	40	40850201	Contact Assy	1	3	6	12				
	Prunter Unit Chassis	41	41862901	PWR unit-ACDC Switch	1	3	6	12	ODA(120V)			
	Prunter Unit Chassis	41	42220301	PWR unit-ACDC Switch	1	3	6	12	ODA(120V)/TAIWAN VE			
	Prunter Unit Chassis	41	41870701	PWR unit-ACDC Switch	1	3	6	12	ODA(230V) /OEL/APS			
	Prunter Unit Chassis	41	42220401	PWR unit-ACDC Switch	1	3	6	12	ODA(230V)/OEL/APS CHINA/KOREA VE			
	Prunter Unit Chassis	43	42046801	PWR unit-High Voltage	1	3	6	12				
	Prunter Unit Chassis	44	2381023P0003	TW-VFH-16-0.1X-330-2	1	3	6	12				
	Prunter Unit Chassis	45	41128101	Sheet-Insulator	1	3	6	12				
	Prunter Unit Chassis	47	PB4013-3100P006	Cup Screw A	26	-	-	-				
	Prunter Unit Chassis	48	PSW4-8C	Screw	1	-	-	-				
	Prunter Unit Chassis	49	41346301	Holder Assy.-Belt Fuse	2	6	12	24				
	Prunter Unit Chassis	50	41469006	Motor-Fan	1	3	6	12				
	Prunter Unit Chassis	51	PB4083-2500P008	TAPPING SCREW B2	29	-	-	-				
	Prunter Unit Chassis	52	41469005	Motor-Fan	1	3	6	12				
	Prunter Unit Chassis	53	41469003	Motor-Fan	1	3	6	12				
	Prunter Unit Chassis	54	42309801	Film-Duct	1	3	6	12				
	Prunter Unit Chassis	55	5632001P0001	Z4D-B01	1	3	6	12				

Rev	Unit Name	No.	Part No.	Part Name	Q'ty /Unit	Recommended Q'ty/Year			Remarks	Special	Del/ Add	ks for environment
						per 500	per 1000	per 2000				
	Prunter Unit Chassis	56	41911201	PlateAssy.-Pickup(711)	1	3	6	12				
	Prunter Unit Chassis	57	41911101	Cover Assy.-Thickness	1	3	6	12				
	Prunter Unit Chassis	58	41888701	Cover-Seal Sensor	1	3	6	12				
	Prunter Unit Chassis	59	41928801	Stage-Pickup	1	3	6	12				
	Prunter Unit Chassis	60	42199601	Sensor-Waste-Chassis	1	3	6	12				
	Paper Tray Guide	1	40839802	Feeder-Unit Main(PX711)	1	3	6	12				
	Paper Tray Guide	2	40371302	ROLLER Assy.-Hopping	1	3	6	12				
	Paper Tray Guide	3	40313202	Roller Assy.-Feed	1	3	6	12				
	Paper Tray Guide	4	40325401	Gear-z58	1	3	6	12				
	Paper Tray Guide	5	40839001	Guide Assy.-Cass(L)	1	3	6	12				
	Paper Tray Guide	6	40839406	Guide Assy.-Cass(R)	1	3	6	12				
	Paper Tray Guide	11	40349701	Roller-Link	2	6	12	24				
	Paper Tray Guide	12	40368304	Board-PXC	1	3	6	12				
	Paper Tray Guide	14	PP4076-5360P001	Spring-Detector	1	3	6	12				
	Paper Tray Guide	15	41309106	Tray2 connector Assy	1	3	6	12				
	Paper Tray Guide	16	PB4016-1960P004	RUBBER FOOT	4	12	24	48				
	Paper Tray Guide	19	PB4083-2500P008	TAPPING SCREW B2	13	-	-	-				
	Paper Tray Guide	20	PB4083-5670P002	Screw-P_Taight	8	-	-	-				
	Paper Tray Guide	21	41275901	Microswitch-Assy	1	3	6	12				
	Duplex Unit	1	41946501	Frame-Main-Assy.-PX711	1	3	6	12				
	Duplex Unit	2	PB4043-4718P001	Tapping-Screw	2	-	-	-				
	Duplex Unit	3	PB4083-2500P010	TAPPING SCREW B1	6	-	-	-				
	Duplex Unit	4	PB4083-2500P008	TAPPING SCREW B2	15	-	-	-				
	Duplex Unit	5	PB4013-3100P006	Cup Screw A	3	-	-	-				
	Duplex Unit	6	41945301	PX711 Duplex-Uit(ODA)	1	-	-	-	ODA			
	Duplex Unit	6	41945303	PX711 Duplex-Uit(OEL)	1	-	-	-	OEL			
	Duplex Unit	6	41945307	PX711 Duplex-Uit(APS)	1	-	-	-	APS			
	2nd_3rd Tray	1	41945401	Tray-Option-PX711(ODA)	1	-	-	-	ODA			
	2nd_3rd Tray	1	41945403	Tray-Option-PX711(OEL)	1	-	-	-	OEL			
	2nd_3rd Tray	1	41945407	Tray-Option-PX711(APS)	1	-	-	-	APS			
	2nd_3rd Tray	2	41780305	Board-V7X	1	3	6	12	For old sensor			
	2nd_3rd Tray	2	41780315	Board-V7X	1	3	6	12	For new sensor			
	2nd_3rd Tray	3	41400501	Cover-FrontOP Assy	1	3	6	12				
	2nd_3rd Tray	4	41462301	Option Tray(2) Connector Assy	1	3	6	12				
	2nd_3rd Tray	5	41462201	Option Tray(1) Connector Assy	1	3	6	12				
	2nd_3rd Tray	6	41398103	Frame Assy.-Hopping OP(PX711)	1	3	6	12				
	2nd_3rd Tray	7	42107701	Motor-Pulse(Opt)	1	3	6	12				
	2nd_3rd Tray	8	41859201	Clutch-MCA26	1	3	6	12				
	2nd_3rd Tray	9	41829101	Connector-Protector	1	3	6	12				